
Suction Line / Stainless Steel Series
Adapter Flanges in stainless steel 1.4404

The *asa* suction unit is screwed to the *asa* adapter flange, which is welded to the tank. Due to low installation costs and compact design, purchasing asa suction units is cost effective. A switch (mechanical or inductive) can be mounted on the standard block for monitoring matters. The adapter flange may only be welded with demounted butterfly flange.

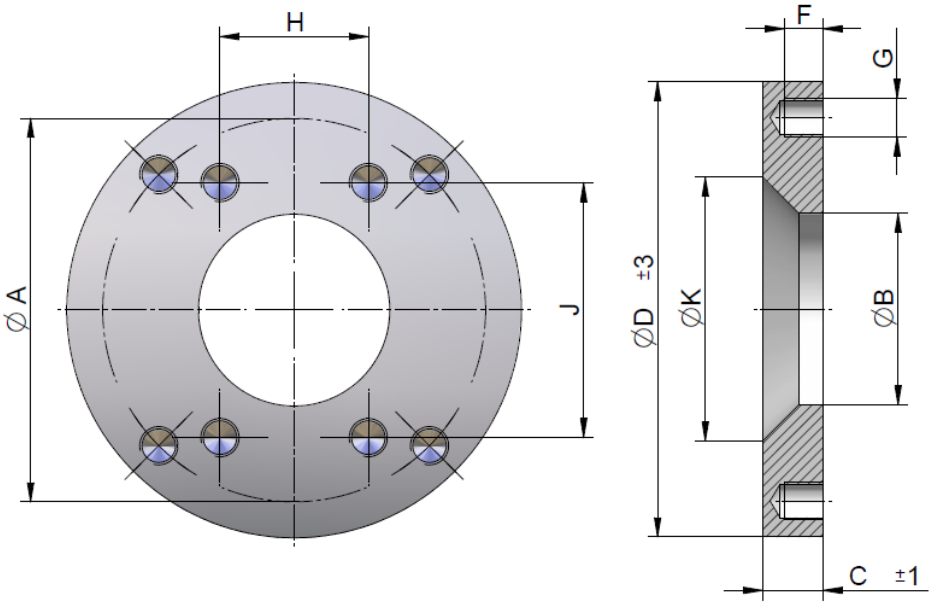


order number	description	A	B	C	D	F	G	H	J	K	weight
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
SDAET063SSK	Adapter 50 & 63 SS	125	63	25	150	16	M12 (4x)	--	--	103 ±1	2,5
SDAET080SSK	Adapter 80 SS	--	82	25	150	14	M16 (4x)	62	106,4	109 ±1	2,2
SDAET100SSK	Adapter 100 SS	--	100	25	180	14	M16 (4x)	77,8	130	139 ±1	2,8

Material

flange material	stainless steel 1.4404

Fits On

SDAET063SSK	SDA0050SS, SDA0063SS
SDAET080SSK	SDA0080SS

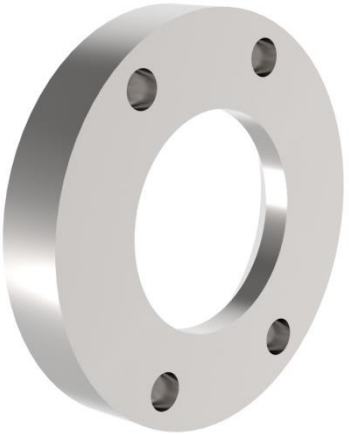

This data sheet and the corresponding scale drawings are to be used as a general guideline and technical overview of our products. Please contact us if more exact information is needed. As we are constantly improving our products, their characteristics, dimensions and weights may also change, although we do our best to incorporate these changes continually. asa assumes no liability for any information therein, any errors, omissions, misprints, nor any direct or indirect damages, losses or costs resulting therefrom. Any cooling performances and general technical values indicated in this catalogue are measured at a test bench according to asa testing procedures or calculated, based on such tests. Due to different conditions in testing and application environments the performance may also vary by +/- 15%. Because there is no standardized testing procedure, tests used by other manufacturers could have different results. Therefore we recommend all products to be checked under the system operating conditions. This is also true for vibrations and mechanical stress as well as for pressure peaks and thermal stress and any other relevant factors. General tolerances according to DIN ISO 2768-vL. General tolerances for casted parts according EN ISO 8062-3 (DCTG 10). Tolerances for rubber parts are according to ISO 3302-1 (class M4-F+C).. The tolerances of welding seams are defined by quality group D according to EN ISO 10042, if it is not specified on the actual scale drawing or data sheet. In addition to that we point out that any data sheet and corresponding scale drawing is no substitution for the manual.

© asa technology, October 2020