

Suction Line / Stainless Steel Series
Accessories

Inductive Limit Switch




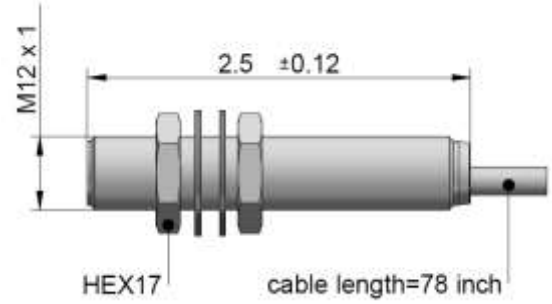



order number	EAFSISSKU00
description	Inductive switch SS
Operating voltage	10...30 VDC
Rated operating current	200 mA
Switching frequency	3500 Hz
Switching output	PNP normally open (NO)
Rated operating distance	0.078 inch
Conductor cross-section	0,00052 inch²
Installation	for flush mounting
Size	M12x1
Tightening torque	12 Nm
Protection degree	IP68
Ambient temperature	-40...185 °F
Housing material	Stainless steel

Locking plunger for key operation

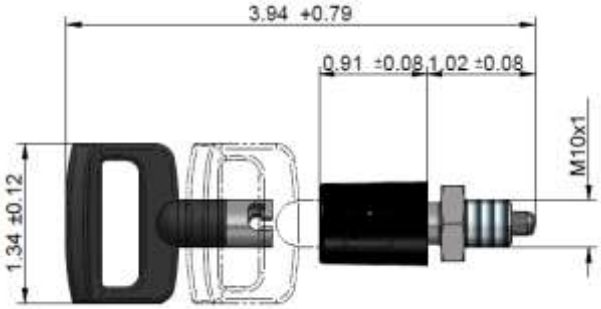



order number	SDAERASTBELSSU00
description	Locking plunger for key operation SS
Threaded body	Stainless steel
Pin	Stainless steel
Spring	Stainless steel
Cap	PA
Key	PA / zinc coated steel*

*) We recommend to store the key after use in a safe environment, as the metal part of the key has not the same corrosion resistance as the rest of locking plunger.

Please contact us for further information at sales_us@asahydraulik.com or online www.asahydraulik.com.

This data sheet and the corresponding scale drawings are to be used as a general guideline and technical overview of our products. Please contact us if more exact information is needed. As we are constantly improving our products, their characteristics, dimensions and weights may also change, although we do our best to incorporate these changes continually. asa assumes no liability for any information therein, any errors, omissions, misprints, nor any direct or indirect damages, losses or costs resulting therefrom. Any cooling performances and general technical values indicated in this catalogue are measured at a test bench according to asa testing procedures or calculated, based on such tests. Due to different conditions in testing and application environments the performance may also vary by +/- 15%. Because there is no standardized testing procedure, tests used by other manufacturers could have different results. Therefore we recommend all products to be checked under the system operating conditions. This is also true for vibrations and mechanical stress as well as for pressure peaks and thermal stress and any other relevant factors. General tolerances according to DIN ISO 2768-vL, General tolerances for casted parts according EN ISO 8062-3 (DCTG 10). Tolerances for rubber parts are according to ISO 3302-1 (class M4-F+C).. The tolerances of welding seams are defined by quality group D according to EN ISO 10042, if it is not specified on the actual scale drawing or data sheet. In addition to that we point out that any data sheet and corresponding scale drawing is no substitution for the manual.

© asa technology, March 2021