



Straight Male BSP Parallel Union with seal S (Heavy) Series - Steel

TrAle®



- **Description** : Union Straight Male BSP (Parallel) with Seal
- **Series** : DIN 24° Heavy Series (S Series)
- **Sizes** : 6S to 38S
- **Material** : Steel
- **Brand** : Trale

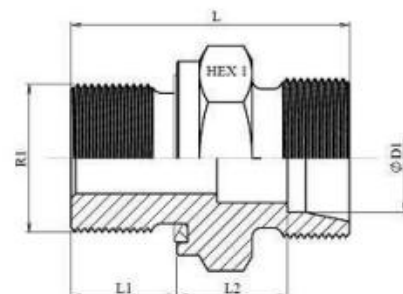

Selection Table : Straight Male BSP Parallel Union with seal S (Heavy) Series - Steel

Code SEDIAP	Reference Dicsa	ØD1	R1	Size	Serie	Working pressure (bar)	L	L1	L2	HEX 1
PR#IG266	STA AS 6 R 1/4 WD	6	1/4" BSP	6S (M14x1.5)	S	630	32	12	13	19
PR#IG267	STA AS 8 R 1/4 WD	8	1/4" BSP	8S (M16x1.5)	S	630	34	12	15	19
PR#IG268	STA AS 8 R 3/8 WD	8	3/8" BSP	8S (M16x1.5)	S	630	34,5	12	15,5	22
PR#IG269	STA AS 10 R 1/4 WD	10	1/4" BSP	10S (M18x1.5)	S	630	34	12	14,5	19
PR#IG270	STA AS 10 R 3/8 WD	10	3/8" BSP	10S (M18x1.5)	S	630	34,5	12	15	22
PR#IG271	STA AS 10 R 1/2 WD	10	1/2" BSP	10S (M18x1.5)	S	630	37	14	15,5	27
PR#IG272	STA AS 12 R 1/4 WD	12	1/4" BSP	12S (M20x1.5)	S	630	36	12	16,5	22
PR#IG273	STA AS 12 R 3/8 WD	12	3/8" BSP	12S (M20x1.5)	S	630	36,5	12	17	22
PR#IG274	STA AS 12 R 1/2 WD	12	1/2" BSP	12S (M20x1.5)	S	630	39	14	17,5	27
PR#IG275	STA AS 14 R 3/8 WD	14	3/8" BSP	14S (M22x1.5)	S	630	38,5	12	12,5	24
PR#IG276	STA AS 14 R 1/2 WD	14	1/2" BSP	14S (M22x1.5)	S	630	41	14	19	27
PR#IG277	STA AS 16 R 3/8 WD	16	3/8" BSP	16S (M24x1.5)	S	420	38,5	12	18	27
PR#IG278	STA AS 16 R 1/2 WD	16	1/2" BSP	16S (M24x1.5)	S	420	41	14	18,5	27
PR#IG279	STA AS 16 R 3/4 WD	16	3/4" BSP	16S (M24x1.5)	S	420	43	16	18,5	32
PR#IG280	STA AS 20 R 1/2 WD	20	1/2" BSP	20S (M30x2)	S	420	45	14	12	32
PR#IG281	STA AS 20 R 3/4 WD	20	3/4" BSP	20S (M30x2)	S	420	47	16	20,5	32
PR#IG282	STA AS 25 R 3/4 WD	25	3/4" BSP	25S (M36x2)	S	420	51	16	23	41
PR#IG283	STA AS 25 R 1 WD	25	1" BSP	25S (M36x2)	S	420	53	18	23	41
PR#IG284	STA AS 30 R 1 WD	30	1" BSP	30S (M42x2)	S	420	55	18	23,5	46
PR#IG285	STA AS 30 R 1 1/4 WD	30	1 1/4" BSP	30S (M42x2)	S	420	57	20	23,5	50
PR#IG286	STA AS 38 R 1 1/4 WD	38	1 1/4" BSP	38S (M52x2)	S	315	62	20	26	55
PR#IG287	STA AS 38 R 1 1/2 WD	38	1 1/2" BSP	38S (M52x2)	S	315	64	22	24	55

*Red numbers indicate non-standard options.